


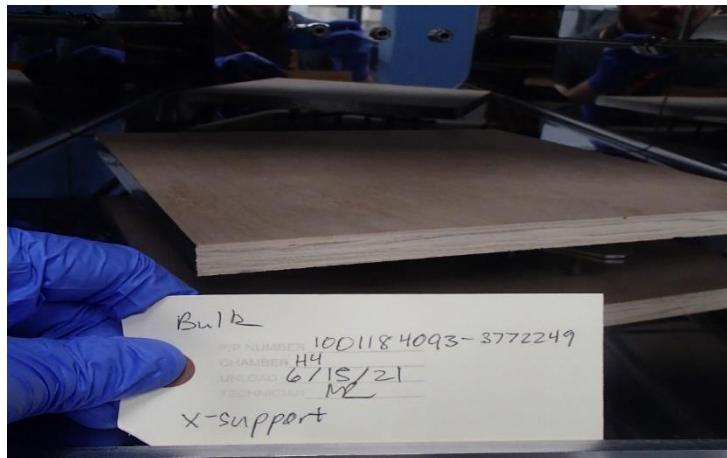


GREENGUARD CERTIFICATION TEST REPORT					
<b>Customer Information</b>	ROSEBURG FOREST PRODUCTS SOUTH L P DAWN GARCIA 3660 GATEWAY ST SPRINGFIELD OR 97477				
<b>Product Description</b>	Roseburg SkyPly® Domestic, Engineered & Exotic Hardwood Plywood Panels				
<b>Test Group</b>	Plywood Products - 01				
<b>Category</b>	General Construction Materials				
<b>Test Type</b>	Certification	Year 6			
<b>Test Method</b>	UL 2821 "GREENGUARD Certification Program Method for Measuring and Evaluating Chemical Emissions From Building Materials, Finishes and Furnishings Using Dynamic Environmental Chambers"				
	<b>Environment</b>	<b>TVOC</b>	<b>Formaldehyde</b>	<b>Total Aldehydes</b>	<b>CREL/TLV</b>
<b>GREENGUARD</b>	Office	✓	✓	✓	✓
✓ - meets criteria; X - over criteria					
<b>Authorized by</b>	 Allyson M. McFry Chemistry Laboratory Director				

MODELING FOR PREDICTED AIR CONCENTRATION					
<b>Certification Program</b>	<b>Environment Basis</b>	<b>Modeling Basis</b>	<b>Surface Area (m<sup>2</sup>)</b>	<b>Room Volume (m<sup>3</sup>)</b>	<b>ACH (1/hr)</b>
<b>GREENGUARD</b>	CDPH/EHLB/Standard Method	wall	33.4	30.6	0.68

Note that certain environments and/or modeling scenarios may prevent assessment of low level CREL and TLV analytes due to the emissions being below the lower LOQ (0.04 µg). For example, benzene ½ CREL is 1.5 µg/m<sup>3</sup>.

### PHOTOGRAPH OF SAMPLE



## GREENGUARD RESULTS SUMMARY

Product Description		Roseburg SkyPly® Domestic, Engineered & Exotic Hardwood Plywood Panels	
GREENGUARD Acceptable IAQ Criteria		168 Hour Product Measurement	Product Compliance for IAQ
TVOC <sup>a</sup>	≤ 0.5 mg/m <sup>3</sup>	0.001 mg/m <sup>3</sup>	Yes
Formaldehyde	≤ 0.05 ppm	0.019 ppm	Yes
Total Aldehydes <sup>b</sup>	≤ 0.10 ppm	0.019 ppm	Yes
Individual VOCs	all ≤ 1/10 TLV	----- <sup>c</sup>	Yes
<sup>a</sup> “TVOC” is the sum of all VOCs measured via TD/GC/MS which elute between n-hexane (C <sub>6</sub> ) and n-hexadecane (C <sub>16</sub> ) quantified using calibration to a toluene surrogate. <sup>b</sup> “Total Aldehydes” is the sum of all measured normal aldehydes from formaldehyde to nonanal, plus benzaldehyde. Heptanal through nonanal are analyzed using TD/GC/MS. The remaining aldehydes are analyzed using HPL/UV methodology. All aldehydes are quantified to authentic standards. <sup>c</sup> All individual VOCs detected met the criteria of less than 1/10 the ACGIH established threshold limit values (TLVs).			

## PROJECT DESCRIPTION

This study was conducted using a UL Environment's GREENGUARD test method following the requirements of GREENGUARD Certification program. The product was monitored for emissions of total volatile organic compounds (TVOC), formaldehyde, target list aldehydes, and other individual volatile organic compounds (VOCs) over a 168 hour exposure period. These emissions were measured and the resultant air concentrations were determined for each of the potential pollutants. Determination of compliance is based on predicted air concentrations modeled using the GREENGUARD program room loading.

### Report Outline:

Table 1	<a href="#">Environmental Chamber Study Parameters</a>
Table 2	<a href="#">Emission Factors and Predicted Air Concentrations</a>
Table 3	<a href="#">Chamber Concentrations of Identified VOCs</a>
Table 4	<a href="#">Emission Factors of Identified VOCs</a>
Table 5	<a href="#">Chamber Concentrations of Target List Aldehydes</a>
Table 6	<a href="#">Emission Factor of Target List Aldehydes</a>
Table 7	<a href="#">Supplemental Emissions Information</a>
Chain of Custody	<a href="#">Chain of Custody</a>

Download more information regarding UL's technical references and resources, product evaluation methodologies information, quality control program, and environmental chamber evaluations from our website [click here](#) or <https://www.ul.com/offerings/greenguard-certification>

For RSD, Quality Assurance Report or other quality documents, [Request](#) here or contact ULE.

**TABLE 1**

<b>ENVIRONMENTAL CHAMBER STUDY PARAMETERS</b>			
<b>Product Description</b>	Roseburg SkyPly® Domestic, Engineered & Exotic Hardwood Plywood Panels		
<b>Product Manufacture Date</b>	May 27, 2021		
<b>Product Collection Date</b>	May 27, 2021		
<b>Product Shipping Date</b>	May 27, 2021		
<b>Date Received</b>	June 3, 2021		
<b>Test Description</b>	The product was received by UL Environment as packaged and shipped by the customer. The package was visually inspected and stored in a controlled environment immediately following sample check-in. Just prior to loading, the product was unpackaged and prepared for the required loading to expose the finished surfaces only. The sample was placed inside the environmental chamber and tested according to the specified protocol.		
<b>Test Period</b>	June 8, 2021 - June 15, 2021		
<b>Area</b>	two-sided area = 0.1836 m <sup>2</sup>		
<b>Environmental Chamber ID and Volume</b>	SH4 - 0.0870 m <sup>3</sup>		
<b>Product Loading</b>	2.11 m <sup>2</sup> /m <sup>3</sup>		
<b>Test Conditions</b>	1.00 ± 0.05 ACH 50% RH ± 5% RH 22.7°C - 23.6°C		
<b>*Accredited Laboratory Locations</b>	<b>Testing Laboratory</b>	<b>Analytical Laboratory</b>	<b>Technical Reporting Location</b>
	ULE - Marietta	ULE - Marietta	ULE - Marietta

The temperature range specification is 23°C ± 1°. The actual temperature range listed above may vary slightly. If the range is outside this specification, data was reviewed to ensure a negative impact did not occur.

<b>*Accredited Laboratory Locations</b>	
<b>Location</b>	<b>Address</b>
ULE - Marietta	UL Environment 2211 Newmarket Parkway, Marietta, GA 30067-9399 USA
ULE - Guangzhou	UL Verification Services (Guangzhou) 1-3F & Room 501, Building 2 (R&D Center A1), No. 25, South Huanshi Avenue, Nansha District, Guangzhou 511458, China
ULE - Cabiato	UL International Italia S.r.l ATTN: IAQ Laboratory Via Europa, 9, I – 22060 – Cabiato (Como), Italia
ULE - Vietnam	UL VS (VIET NAM) CO. LTD., Lot C5, Conurbation 2, Street K1, Cat Lai Industrial Zone, Thanh My Loi Ward, District 2, Ho Chi Minh City, Vietnam
UL - Shimadzu	Shimadzu Techno-Research, Inc. 1, Nishinokyo-Shimoaicho Nakagyo-ku, Kyoto 604-8436 Japan
KCL	Korea Conformity Laboratories #805, I-Valley, 149 Gongdan-ro Gunpo-si, Gyeonggi-do, 15849 Korea
Servaco	Servaco Product Testing N.V. Boertang 200 2400 MOL Belgium

This test is accredited and meets the requirements of ISO/IEC 17025 as verified by ANSI National Accreditation Board. Refer to certificate and scope of accreditation AT-1297.

**TABLE 2**

<b>Product Description</b>		Roseburg SkyPly® Domestic, Engineered & Exotic Hardwood Plywood Panels		
<b>TVOC CHAMBER CONCENTRATIONS, EMISSION FACTORS AND PREDICTED AIR CONCENTRATIONS</b>				
Elapsed Exposure Hour*	Chamber Concentration $\mu\text{g}/\text{m}^3$	Emission Factor $\mu\text{g}/\text{m}^2\cdot\text{hr}$	Predicted Air Concentration** $\mu\text{g}/\text{m}^3$	
0 (Background)	BQL	BQL	---	
6	35.2	16.7	27	
24	16.2	7.6	12	
48	9.4	4.4	8	
72	7.1	3.3	5	
96	4.2	2.0	3	
168	2.4	1.1	1	
1 <sup>st</sup> Order Exponential Decay Constant = $k_T = 0.018$				
<b>FORMALDEHYDE CHAMBER CONCENTRATIONS, EMISSION FACTORS AND PREDICTED AIR CONCENTRATIONS</b>				
Elapsed Exposure Hour*	Chamber Concentration $\mu\text{g}/\text{m}^3$	Emission Factor $\mu\text{g}/\text{m}^2\cdot\text{hr}$	Predicted Air Concentration**	
			$\mu\text{g}/\text{m}^3$	ppm
0 (Background)	BQL	BQL	---	---
6	61.5	29.1	47	0.038
24	43.1	20.4	33	0.027
48	41.3	19.6	31	0.026
72	38.6	18.3	30	0.024
96	37.0	17.5	28	0.023
168	30.7	14.5	24	0.019
1 <sup>st</sup> Order Exponential Decay Constant = $k_F = 0.002$				
<b>TARGET LIST ALDEHYDES CHAMBER CONCENTRATIONS, EMISSION FACTORS AND PREDICTED AIR CONCENTRATIONS</b>				
Elapsed Exposure Hour*	Chamber Concentration $\mu\text{g}/\text{m}^3$	Emission Factor $\mu\text{g}/\text{m}^2\cdot\text{hr}$	Predicted Air Concentration**	
			$\mu\text{g}/\text{m}^3$	ppm
0 (Background)	BQL	BQL	---	---
6	71.1	33.7	54	0.041
24	43.1	20.4	33	0.027
48	41.3	19.6	31	0.026
72	38.6	18.3	30	0.024
96	37.0	17.5	28	0.023
168	30.7	14.5	24	0.019
1 <sup>st</sup> Order Exponential Decay Constant = $k_A = 0.002$				

\*Exposure hours are nominal ( $\pm 1$  hour).

BQL = Below quantifiable level of 0.04  $\mu\text{g}$  based on a standard 18 L air collection volume for VOCs and 0.1  $\mu\text{g}$  based on a standard 45 L air collection volume for aldehydes.

\*\*Predicted Air Concentrations are based on GREENGUARD modeling predicted concentration parameters. For more information [click here](#).

**TABLE 3**

<b>Product Description</b>		Roseburg SkyPly® Domestic, Engineered & Exotic Hardwood Plywood Panels						
<b>CHAMBER CONCENTRATIONS OF IDENTIFIED INDIVIDUAL VOLATILE ORGANIC COMPOUNDS</b>								
<b>CAS Number</b>	<b>Compound</b>	<b>Elapsed Exposure Hour (µg/m³)</b>						
		<b>0 (BG)</b>	<b>6</b>	<b>24</b>	<b>48</b>	<b>72</b>	<b>96</b>	<b>168</b>
104-76-7	1-Hexanol, 2-ethyl <sup>†</sup>	BQL	20.9	9.3	6.6	4.9	4.2	2.4
108-88-3	Toluene (Methylbenzene)	BQL	8.4	4.3	2.8	2.2		
64-19-7	Acetic acid	BQL	5.9	4.8	3.0	3.2	2.5	2.2
79-09-4	Propanoic acid	BQL	3.4	2.6				
25265-77-4	2,2,4-Trimethyl-1,3-pentanediol monoisobutyrate	BQL	2.5					
107-98-2	2-Propanol, 1-methoxy- <sup>*†</sup>	BQL	2.4					

**TABLE 4**

<b>Product Description</b>		Roseburg SkyPly® Domestic, Engineered & Exotic Hardwood Plywood Panels					
<b>EMISSION FACTORS OF IDENTIFIED INDIVIDUAL VOLATILE ORGANIC COMPOUNDS</b>							
<b>CAS Number</b>	<b>Compound</b>	<b>Elapsed Exposure Hour (µg/m²·hr)</b>					
		<b>6</b>	<b>24</b>	<b>48</b>	<b>72</b>	<b>96</b>	<b>168</b>
104-76-7	1-Hexanol, 2-ethyl <sup>†</sup>	9.9	4.4	3.1	2.3	2.0	1.1
108-88-3	Toluene (Methylbenzene)	4.0	2.0	1.3	1.0		
64-19-7	Acetic acid	2.8	2.3	1.4	1.5	1.2	1.1
79-09-4	Propanoic acid	1.6	1.2				
25265-77-4	2,2,4-Trimethyl-1,3-pentanediol monoisobutyrate	1.2					
107-98-2	2-Propanol, 1-methoxy- <sup>*†</sup>	1.1					

\*Indicates NIST/EPA/NIH best library match only based on retention time and mass spectral characteristics.

<sup>†</sup>Denotes quantified using multipoint authentic standard curve. Other VOCs quantified relative to toluene. Quantifiable level is 0.04 µg based on a standard 18 L air collection volume.

**TABLE 5**

<b>Product Description</b>		Roseburg SkyPly® Domestic, Engineered & Exotic Hardwood Plywood Panels						
<b>CHAMBER CONCENTRATIONS OF TARGET LIST ALDEHYDES</b>								
<b>CAS Number</b>	<b>Compound</b>	<b>Elapsed Exposure Hour (µg/m³)</b>						
		<b>0 (BG)</b>	<b>6</b>	<b>24</b>	<b>48</b>	<b>72</b>	<b>96</b>	<b>168</b>
4170-30-3	2-Butenal	BQL						
75-07-0	Acetaldehyde	BQL	5.6					
100-52-7	Benzaldehyde	BQL						
5779-94-2	Benzaldehyde, 2,5-dimethyl	BQL						
529-20-4	Benzaldehyde, 2-methyl	BQL						
620-23-5 / 104-87-0	Benzaldehyde, 3- and/or 4-methyl	BQL						
123-72-8	Butanal	BQL						
590-86-3	Butanal, 3-methyl	BQL						
50-00-0	Formaldehyde	BQL	61.5	43.1	41.3	38.6	37.0	30.7
66-25-1	Hexanal	BQL	4.0					
110-62-3	Pentanal	BQL						
123-38-6	Propanal	BQL						

**TABLE 6**

<b>Product Description</b>		Roseburg SkyPly® Domestic, Engineered & Exotic Hardwood Plywood Panels						
<b>EMISSION FACTORS OF TARGET LIST ALDEHYDES</b>								
<b>CAS Number</b>	<b>Compound</b>	<b>Elapsed Exposure Hour (µg/m²·hr)</b>						
		<b>6</b>	<b>24</b>	<b>48</b>	<b>72</b>	<b>96</b>	<b>168</b>	
4170-30-3	2-Butenal							
75-07-0	Acetaldehyde	2.7						
100-52-7	Benzaldehyde							
5779-94-2	Benzaldehyde, 2,5-dimethyl							
529-20-4	Benzaldehyde, 2-methyl							
620-23-5 / 104-87-0	Benzaldehyde, 3- and/or 4-methyl							
123-72-8	Butanal							
590-86-3	Butanal, 3-methyl							
50-00-0	Formaldehyde	29.1	20.4	19.6	18.3	17.5	14.5	
66-25-1	Hexanal	1.9						
110-62-3	Pentanal							
123-38-6	Propanal							

Quantifiable level is 0.1 µg is based on a standard 45 L air collection volume.

## TABLE 7

### SUPPLEMENTAL EMISSIONS INFORMATION

The table below represents this product's identified chemical emissions found on certain regulatory lists. This list only provides a statement regarding possible health effects associated with this compound and not the relative risks of exposure. Proper interpretation of the risks associated with exposure to a given regulated compound requires a more detailed evaluation of toxicological activity. Certain purchasing programs may require this information be submitted.

Product Description		Roseburg SkyPly® Domestic, Engineered & Exotic Hardwood Plywood Panels					
CAS Number	Compound	√() = FOUND IN LISTING (CLASS)					
		CAL PROP. 65	NTP	IARC	CAL AIR TOXICS	CREL	TLV
107-98-2	2-Propanol, 1-methoxy-†					✓	✓
75-07-0	Acetaldehyde	√(1)	√(2B)	√(2B)	√(IIA)	✓	✓
64-19-7	Acetic acid						✓
50-00-0	Formaldehyde	√(1)	√(2A)	√(1)	√(IIA)	✓	✓
79-09-4	Propanoic acid						✓
108-88-3	Toluene (Methylbenzene)	√(2)		√(3)	√(IIA)	✓	✓

†Denotes quantified using multipoint authentic standard curve

CAL Prop. 65: California Health and Welfare Agency, Proposition 65 Chemicals

1 = known to cause cancer

2 = known to cause reproductive toxicity

NTP: National Toxicology Program

2A = known to be carcinogenic to humans

2B = reasonably anticipated to be carcinogenic to humans

IARC: International Agency on Research of Cancer

1 = carcinogenic to humans

3 = unclassifiable as to carcinogenicity to humans

2A = probably carcinogenic to humans

4 = probably not carcinogenic to humans

2B = possibly carcinogenic to humans

California Air Toxics

I = Substances identified as Toxic Air Contaminants, known to be emitted in California, with a full set of health values reviewed by the Scientific Review Panel.

IIA = Substances identified as Toxic Air Contaminants, known to be emitted in California, with one or more health values under development by the Office of Environmental Health Hazard Assessment for review by the Scientific Review Panel.

IIB = Substances NOT identified as Toxic Air Contaminants, known to be emitted in California, with one or more health values under development by the Office of Environmental Health Hazard Assessment for review by the Scientific Review Panel.

III = Substances known to be emitted in California and are NOMINATED for development of health values or additional health values.

IVA = Substance identified as Toxic Air Contaminants, known to be emitted in California and are TO BE EVALUATED for entry into Category III.

IVBA = Substance NOT identified as Toxic Air Contaminants, known to be emitted in California and are TO BE EVALUATED for entry into Category III.

V = Substance identified as Toxic Air Contaminants, and NOT KNOWN TO BE EMITTED from stationary source facilities in California based on information from the AB 2588 Air Toxic "Hot Spots" Program and the California Toxic Release Inventory.

VI = Substances identified as Toxic Air Contaminants, NOT KNOWN TO BE EMITTED from stationary source facilities in California, and are active ingredients in pesticides in California.

CREL: California Office of Environmental Health's Hazard Assessment (OEHHA), Chronic Reference Exposure Levels

✓ = Found in Listing

ACGIH TLV American Conference of Governmental Industrial Hygienists Threshold Limit Values for Chemical Substances and Physical Agents.

✓ = Found in Listing.

Date Issued: June 22, 2021  
 Product ID#: 1001184093-3772249  
 Test Report #: 1001184093-3772249  
 ©2021 UL  
 BCM2

## CHAIN OF CUSTODY

INTERNAL Use Only			
Project #	1001184093		
Product #	3772249		
Order #	□□□□□□□□□□ 13766011		
Task Line	1.1	UL BU	
_____ of _____			
 <small>CUVDBIS43</small>			
<input type="checkbox"/> Rush Request – Subject to upcharge. Customer must confirm with UL prior to submission of product.			
GREENGUARD Test Information			
Test Type	<input checked="" type="checkbox"/> Certification Test • Annual/Initial Year 6 <input type="checkbox"/> Quarterly Test • Year Quarter		<input type="checkbox"/> Out-of-Scope Test <input type="checkbox"/> Profile Study Test
Service Line	<input checked="" type="checkbox"/> GREENGUARD <input type="checkbox"/> GREENGUARD GOLD <input type="checkbox"/> Other _____		
Test Group	Plywood Products - 01		
Product Category	Building Construction Materials	Subcategory _____	
Application	<input type="checkbox"/> Floor/Ceiling <input type="checkbox"/> Panel <input type="checkbox"/> Wall	<input type="checkbox"/> Work Surface <input type="checkbox"/> Other: _____	
Wet Products Only	Coverage Rate	Density	Specific Gravity
Product and Company Information			
Product Description	Roseburg SkyPly® Domestic, Engineered & Exotic Hardwood Plywood Panels		
Manufacture ID#			
Company Name	Roseburg	Date Manufactured	05/27/2021
		Contact Name	Dawn Garcia
		Job Title	
Address		Contact Phone	
		Contact Email	D a w n G @ r f p c o . c o
Collection Information			
Collector Name	Mitchell Black	Date Collected	05/27/2021
Collector Phone	541-530-2357	Time Collected	6:30 Am
Collector Signature	<i>Mitchell Black</i>	Collection Location	Dillard Plu
Shipping Information			
Carrier	UPS		
Shipper Name	Candi Gaedecke	Date Shipped	05/27/2021
Shipper Phone	(541)679-3311	Time Shipped	10:00am
Shipper Signature	<i>C. Gaedecke</i>	Air Bill #	122R12710397585515
Sample Submitted to			
<input type="checkbox"/> UL Environment (Marietta) <small>2211 Newmarket Pkwy Suite 106 Marietta, GA 30067, USA</small>	<input type="checkbox"/> UL Verification Services (Guangzhou) <small>Building A1, 3F, Nansha Science and Technology Innovation Ctr. No. 25, South Huanshi Avenue, Nansha District, Guangzhou 511458, China</small>	<input type="checkbox"/> UL International Italia S.r.l <small>ATTN: IAQ Laboratory Via Europa, 9 I – 22060 – Cabiato (Como), Italia</small>	<input type="checkbox"/> UL VS (Vietnam) Co., Ltd. <small>Lot C5, Conurbation 2, Street K1, Cat Lai Industrial Zone Thanh My Loi Ward, District 2 Ho Chi Minh City, Vietnam</small>
Post Testing Sample Disposition			
(Sample will be disposed of 30 days after report is issued if information below is not provided)			
Return Shipping Co.		Customer Shipping Acct #	
Internal Use Only – Receiving Information			
Receiver Name		Receiver Signature	<i>[Signature]</i>
Condition Upon Arrival	<input checked="" type="checkbox"/> Acceptable <input type="checkbox"/> Not Acceptable	Receive Date	6/3/21
Condition Notes		Receive Time	12:55 PM
Completed By	ULE	Based On	Program Testing Schedule
		Date	03/31/2021

00-EN-F0853 – Issue 6.0